

#### 2X2 HD VIDEO WALL CONTROLLER HDMI INPUT

### **FEATURES**

- HDMI 2.0 and HDCP 2.2 compliant
- Support multi-resolution up to 3840x2160@60Hz video output for video wall
- Support 2 channels HDMI loop out
- Support RS-232 and TCP/IP control
- Support control with displayer by PC Tool or commands


# **APPLICATIONS**

- Corporate or educational Presentations
- Airport installations
- Wall displays
- Digital signage
- Dealer rooms
- Control rooms
- Shopping centers
- Security
- Point-of-sale
- Entertainment venues
- Corporate lobbies
- Restaurants

# **OVERVIEW**

This product is a HDMI 2.0 Video Wall controller with 2 HDMI input, 2 HDMI loop out and 4 HDMI scaling out for video wall processing. With PC Tool or RS232 commands to control the product for different wall display.

## **APPLICATION DIAGRAM**

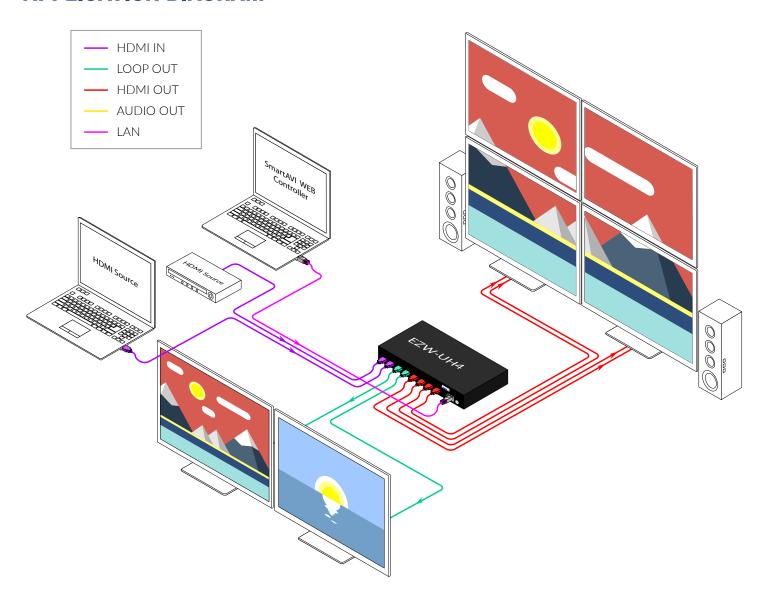


### **RS232/LAN CONTROL CONNECTION**

#### **RS232 CONTROL CONNECTION**

The product supports RS232 control. The user can connect the RS232 port of the product to a PC via a serial cable.

#### NETWORK CONTROL CONNECTION

The product also supports Network control. The user can connect the LAN port of the product to a PC via an UTP cable.

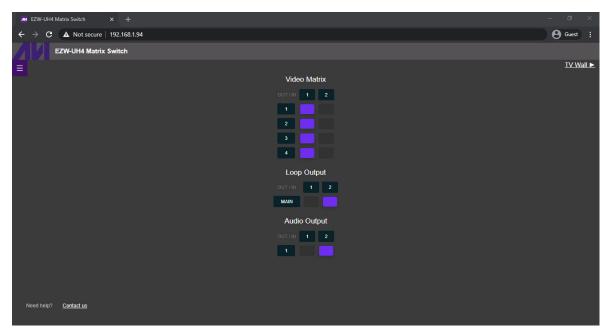

### FRONT AND BACK



EZW-UH4 Back



**EZW-UH4 Front** 

# **TECHNICAL SPECIFICATIONS**

VIDEO & AUDIO		
HDMI Compliance	HDMI2.0	
HDCP Compliance	HDCP2.2/1.4	
Output Resolutions	Up to 1080P (1920x1080@60Hz)	
Input Resolutions	Up to 1080P (1920x1080)	
Outputs	(4) HDMI	
Inputs	(4) HDMI	
Audio	2.0 channel, 5.1 channel, LPCM, Dolby, AC3, DTS	

CONTROL	
RS-232	Baud rate: 57600, data bit: 8, Stop bit: 1, no parity

OTHER		
ESD Protection	Human-body Model: ±8kV (Air-gap discharge) , ±4kV (Contact discharge)	
Power	PS12VD3A	
Dimensions	12.57" W x 1.76" D x 6.69" H	
Weight	4.4 lbs	
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F	
Storage Temperature	-20°C ~ 70°C / -4°F ~ 158°F	
Relative Humidity	10%~50% RH (non-condensing	

PART NO.	DESCRIPTION
EZW-UH4-S	Ultra HD Video Wall Processor. Includes: [EZW-UH4, PS12VD3A-WLLMNT]

